



Professional rolling projection screen for wall-/ceiling mounting or installation in suspended ceiling systems


- Housing:** aluminium housing W 11 x H 11 cm, powder-coated in RAL 9016 Traffic white
- Mounting:** mounting grooves on all sides of the housing enable flexible mounting options on the wall or ceiling, easy installation with Quick mounting kit: position – hinging – securing
- Typ of drive:** crank drive – maintenance-free drive with integrated unwinding limit stop, detachable crank
motor drive – high-quality silenced 230V/50Hz electrical plug-in drive, with thermal protection switch, motor drive on the right seen from the direction of projection, doubled safety due to external limit switch
- Formats:** up to W 300 x H 300 cm
- Screen surface:** Polar PU – Flame retardant, meets the requirements of DIN 4102 – B1
Polar PU – With black border: format 1:1 and 4:3: 5 cm circumferential, format 16:9 and 16:10: 5 cm black border at the right, the left and the bottom edge; top edge with black drop of approx. 30 cm
- Optional:** professional installation system for suspended ceilings with pre-assembly frame, suspended ceiling mounting kit to bridge the gap between raw ceiling and suspended ceiling, wall spacer, remote control, key switch, projection screen unwinding forward, motor/crank drive left

Design according to DIN 56950-4: 2015 Safety requirements and inspections for serially manufactured projection screens

Last update: 25.02.19

HKS
SYSTEMTECHNIK

Dolomit II crank

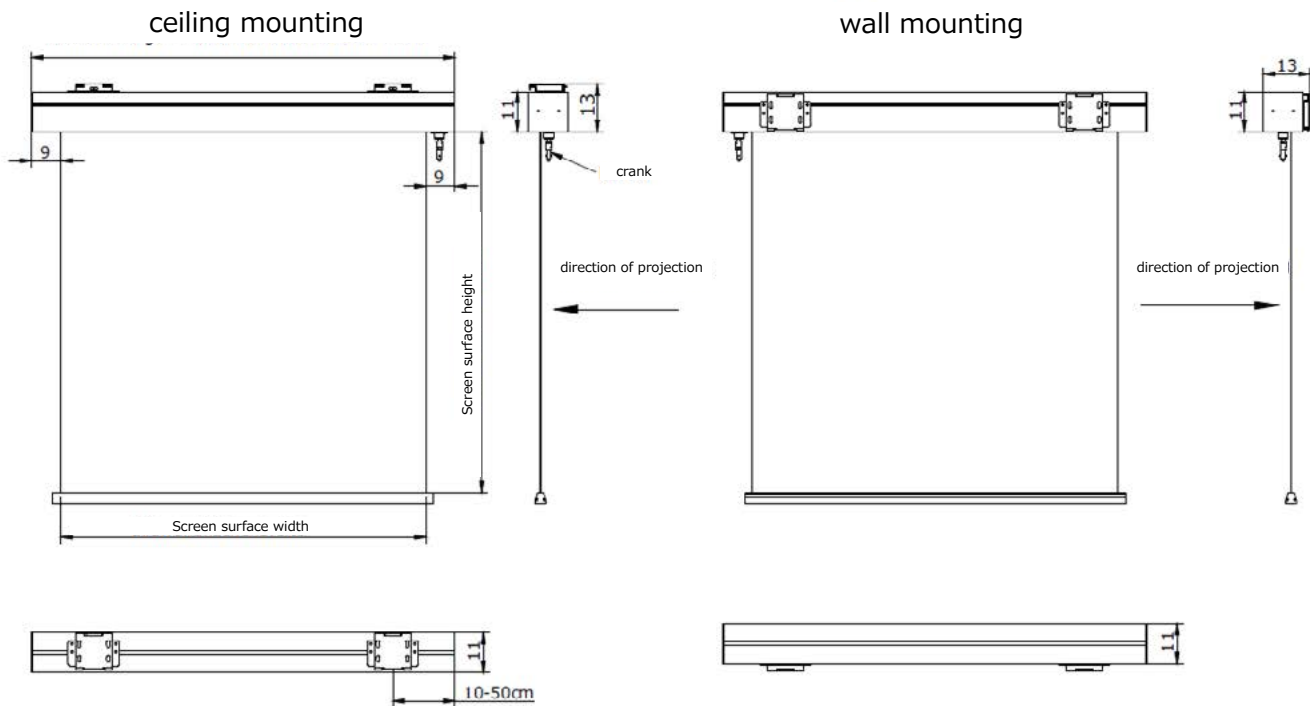

Dolomit II motor

