




Rolling projection screen for home cinema

- Housing:** sheet steel housing W 10.5 x H 10.5 cm
powder-coated in RAL 9003 Signal white
- Mounting:** variable fixing points due to specially developed fixing consoles for wall or ceiling mounting, allow displacement in the range of 50 cm from the outer edge of the housing
- Type of drive:** crank drive – maintenance-free drive with integrated unwinding limit stop, detachable crank
motor drive – high-quality silenced 230V/50Hz electrical plug-in drive, motor drive on the right seen from the direction of projection
- Formats:** up to W 240 x H 240 cm
- Screen surface:** Polar PU – Flame retardant, meets the requirements of DIN 4102 – B1
- Equipment:** radio remote control with 1-channel hand-held transmitter

Design according to DIN 56950-4: 2015 Safety requirements and inspections for serially manufactured projection screens

Titan II crank

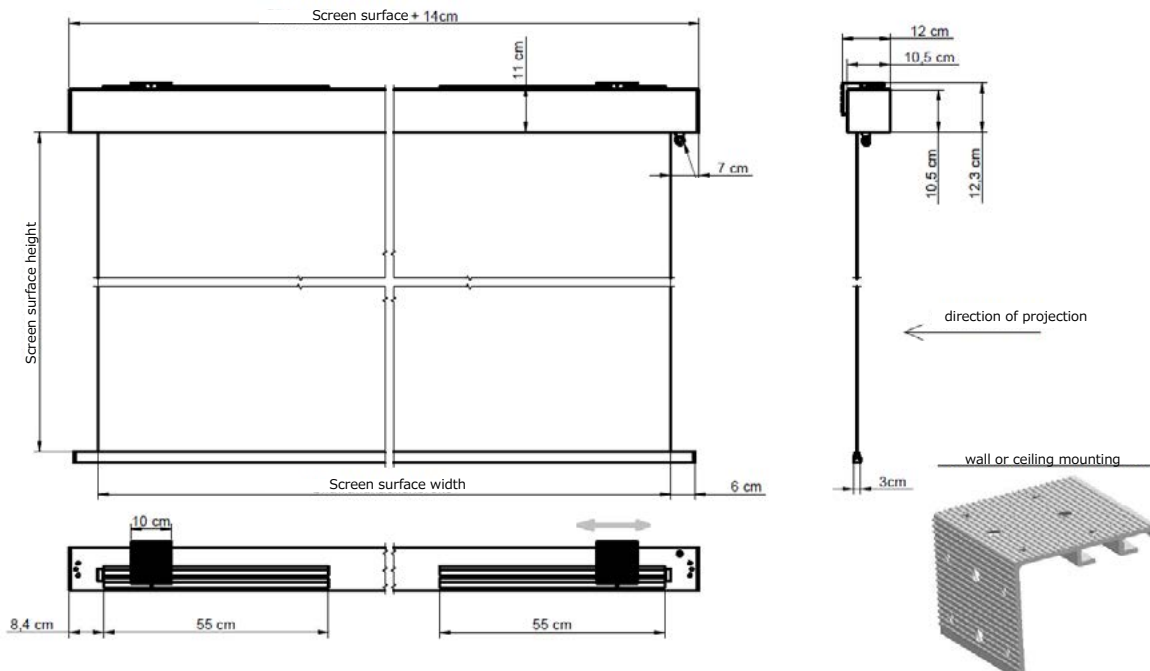

Titan II motor

